


● ● ● Canalizzazione aria

CE

Air FLEX

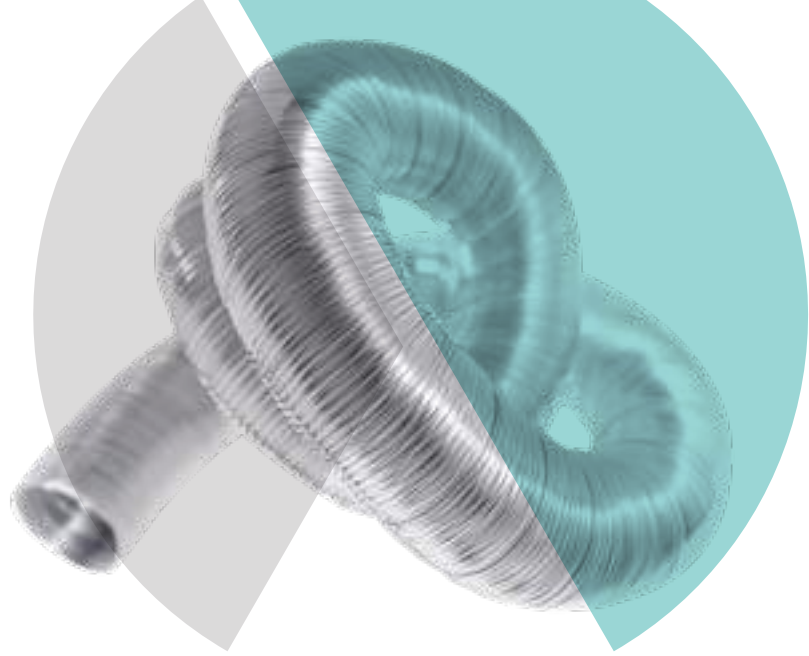

Condotti in classe M0 antincendio in alluminio mono parete flessibile spessore 0,12 mm.

Conduits pour la canalisation d'air en aluminium flexible simple paroi, épaisseur 0,12 mm, avec classement au feu M0.

Ducts made of single wall flexible aluminium 0.12 mm thick, with M0 fire classification.

Conductos flexibles de aluminio de pared simple de 0,12 mm de espesor, con clase de protección contra incendios M0.

Ø disponibili
Ø available
Ø disponibles
Ø disponibles

da 60 e 180 mm

Finiture disponibili
Available finishes
Finitions disponibles
Acabados disponibles



FLEX

Tubo flessibile in alluminio

Flexible pipe in aluminium - Tuyau flexible en aluminium - Tubo flexible de aluminio



Estensibile da 50 cm a 3 mt
Can be extended from 50 cm up to 3 mt
Étirable de 50 cm à 3 mt
Extensible de 50 cm a 3 m

Estensibile da 25 cm a 1,5 mt
Can be extended from 25 cm up to 1,5 mt
Étirable de 25 cm à 1,5 mt
Extensible de 25 cm a 1,5 m

Finiture disponibili - Available finishes - Finitions disponibles - Acabados disponibles

F.12 - ALLUMINIO ALUMINIUM ALUMINIUM - ALUMINIO	F.03 - BIANCO WHITE BLANC - BLANCO	F.01 - NERO BLACK NOIR - NEGRO	Ø	📦
SMA060FLEX	-	SMN060FLEX	60	6
SMA080FLEX	SMB080FLEX	SMN080FLEX	80	6
SMA100FLEX	SMB100FLEX	-	100	6
SMA120FLEX	SMB120FLEX	-	120	6
SMA130FLEX	SMB130FLEX	-	130	6
SMA140FLEX	SMB140FLEX	-	140	6
SMA150FLEX	-	-	150	6
SMA160FLEX	SMB160FLEX	-	160	6
SMA180FLEX	-	-	180	6