




Air FLEX

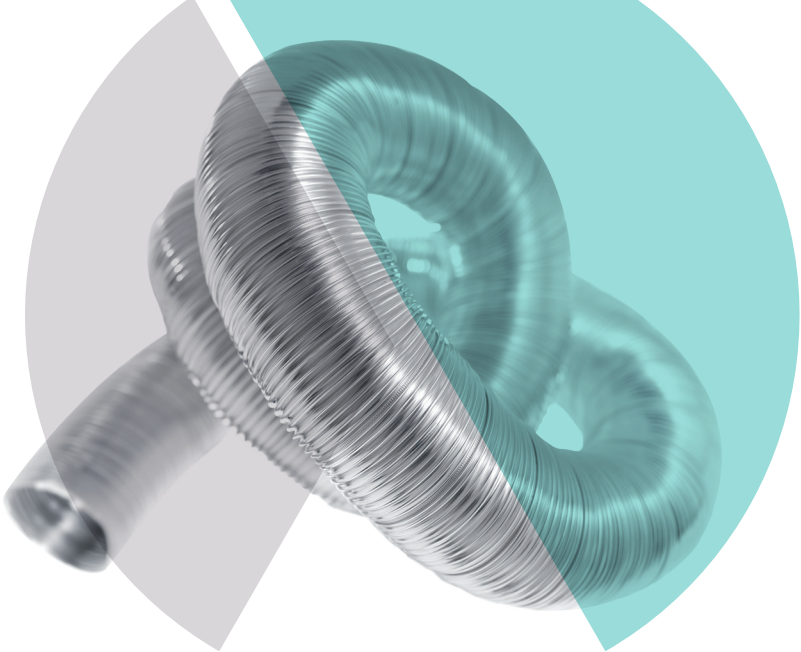

Condotti in classe M0 antincendio in alluminio mono parete flessibile spessore 0,12 mm.

Ducts made of single wall flexible aluminium 0.12 mm thick, with M0 fire classification.

Conduits pour la canalisation d’air en aluminium flexible simple paroi, épaisseur 0,12 mm, avec classement au feu M0.

FLEX
Tubo flessibile in alluminio
Flexible pipe in aluminium - Tuyau flexible en aluminium



Estensibile da 50 cm a 3 mt.
Can be extended from 50 cm up to 3 mt
Étirable de 50 cm à 3 mt

Estensibile da 25 cm a 1,5 mt.
Can be extended from 25 cm up to 1,5 mt
Étirable de 25 cm à 1,5 mt

Finiture disponibili - Available finishes - Finitions disponibles

F.12 - ALLUMINIO ALUMINIUM - ALUMINIUM	F.03 - BIANCO WHITE - BLANC	F.01 - NERO BLACK - NOIR	Ø	Ⓜ
SMA060FLEX	-	SMN060FLEX	60	6
SMA080FLEX	SMB080FLEX*	SMN080FLEX	80	6
SMA100FLEX	SMB100FLEX*	-	100	6
SMA120FLEX	SMB120FLEX*	-	120	6
SMA130FLEX	SMB130FLEX*	-	130	6
SMA140FLEX	SMB140FLEX*	-	140	6
SMA150FLEX	-	-	150	6
SMA160FLEX	SMB160FLEX*	-	160	6
SMA180FLEX	-	-	180	6

* NB: fino ad esaurimento scorte - Note: until stocks run out - NB: jusqu'à épuisement des stocks

Ø disponibili
Ø available
Ø disponibles
da 60 a 180 mm

F.12

ALLUMINIO
ALUMINIUM - ALUMINIUM

F.03

BIANCO
WHITE - BLANC

F.01

NERO
BLACK - NOIR